


Remote Control

System Technical Specification | Aou2463-V1

TRANSMITTER CONTROLS

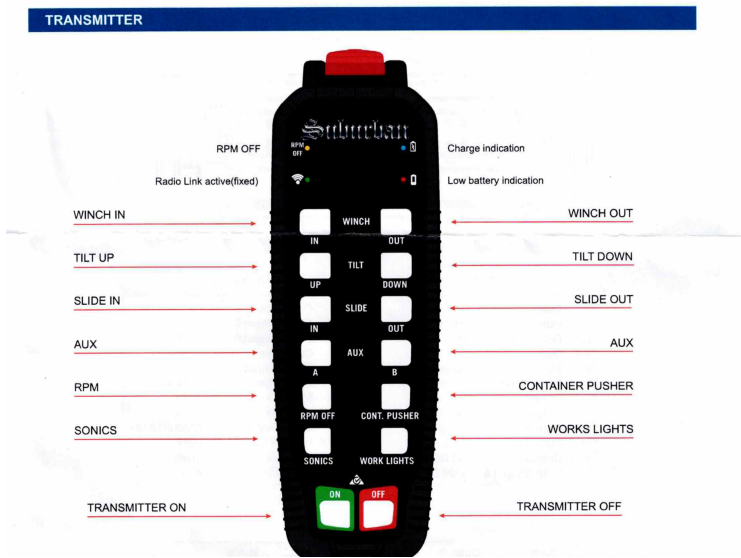

AUTOMATIC SHUTDOWN

15 minutes

RECEIVER TECHNICAL DATA

Power supply	9-36 VDC
IP class	IP65
Overload protection	Yes, maximum 36 VDC
Digital outputs	19 MOSFET driven outputs; short-circuit proof and overload protected
Digital inputs	14; may also be used as digital outputs. Do not exceed supply voltage
E-Stop output	Active when system is operational; short-circuit proof and overload protected
Maximum output load	3A/output, 5A/bank, 10A/system
Current consumption	Less than 30mA idle; 60mA plus external loads in operation
Connector interface	2 x 12-pin Deutsch connectors: grey DTM06-12SA/10 and black DTM06-12SB/10
Programming interface	RS232
Housing screw torque	0.8 Nm
Ambient temperature	-25°C to +70°C
Weight	0.35 kg